




Plate Steel Wood Stoves and Wood Insert (CDW)

Dutchwest Wood Insert Model DW2500X02

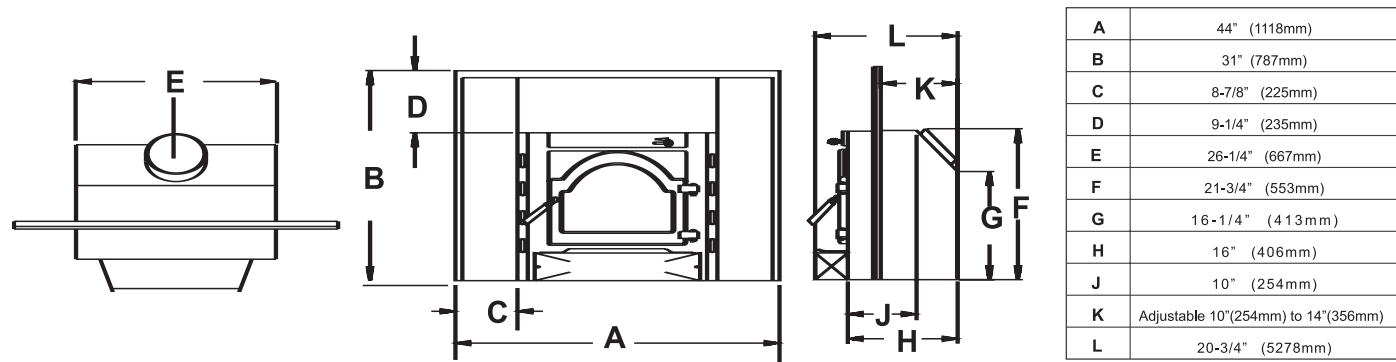

CLEARANCES IN INCHES							
PRODUCT #	A	B	C	D	E	F	G
CDW244	18"	15"	7"	25 1/2"	17 1/2"	15"	56"
CDW2470001							
Single Wall Connector	10 1/2"	10 1/2"	10 1/2"	19"	11 1/2"	19"	54"
Double Wall Connector	2 1/2"	5"	2 1/2"	10 1/2"	5 1/2"	10"	54"
CDW2700007	17 1/2"	13"	11"	28"	15 1/2"	22"	54 1/2"
CDW3000007	26"	15"	12"	35 1/2"	18 1/2"	22"	54"
CDW1000L02							
Single Wall Connector	12"	12 1/2"	7"	19 1/2"	15"	15"	56"
Double Wall Connector	8 1/2"	8"	5 1/2"	15 1/2"	10"	13"	56"
CDW2000L02							
Single Wall Connector	15"	10"	9"	24 1/2"	18 1/2"	19 1/2"	54"
Double Wall Connector	14"	10"	8"	23"	15"	18"	54"

CLEARANCES TO COMBUSTIBLES



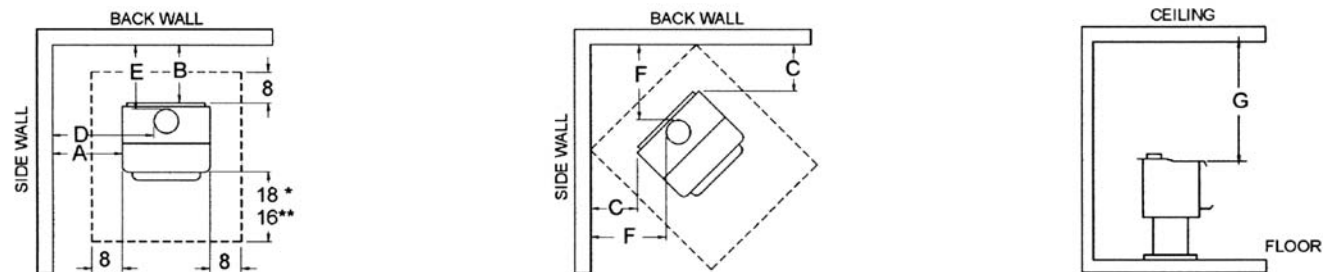


Plate Steel Wood Stove and Wood Insert (DW)

Wood Stove with Legs

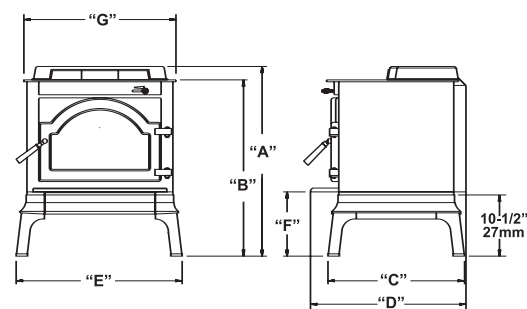

Wood Stove with Pedestal

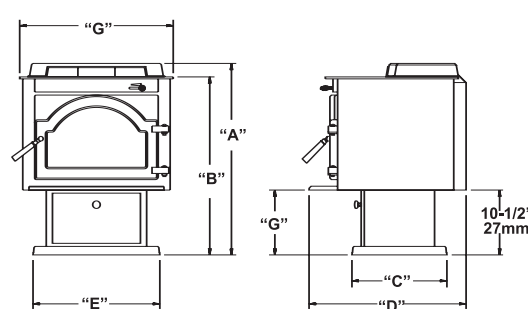

Model (Legs)	A	B	C	D	E	F	G
DW1000L02	29"	25 3/4"	17 1/2"	20 1/2"	24 3/8"	10 3/4"	23 3/4"
	737mm	679mm	521mm	619mm	273mm	273mm	603mm
DW1500L02	30"	27 3/4"	17 3/4"	22 1/4"	28 3/4"	10 3/4"	28 1/4"
	762mm	705mm	450mm	565mm	730mm	273mm	718mm
DW2000L02	31"	28 3/4"	21 7/8"	27"	26 1/2"	10 3/4"	26 1/2"
	787mm	730mm	565mm	686mm	673mm	273mm	667mm

Model (Pedestal)	A	B	C	D	E	F	G
DW1000P02	29"	26 3/4"	17 7/8"	20 1/2"	20 3/4"	10 3/4"	23 3/4"
	737mm	679mm	378mm	521mm	527mm	273mm	603mm
DW1500P02	30"	27 3/4"	15 1/2"	22 1/4"	24 1/2"	10 3/4"	28 1/4"
	762mm	705mm	394mm	565mm	622mm	273mm	718mm
DW2000P02	31"	28 3/4"	15 1/2"	27"	24 1/2"	10 3/4"	26 1/2"
	787mm	730mm	394mm	686mm	622mm	273mm	667mm

Standard Features & Benefits (DW)

- EPA approved, Non-catalytic Technology
- Primary and secondary (heated) combustion air reduces emissions and improves efficiency – more heat from less wood and with longer burn times
- Arched cast iron door with ceramic glass front
- Air wash system for cleaner glass
- Fallaway black wood handle
- Ash cast lip (on stoves only)
- Side shields (on stoves) for reduced clearances
- Top air guide for improved heat distribution (on stoves only)
- Limited lifetime warranty

Dutchwest Steel Plate Wood Stoves & Insert Specs				
	Wood Stove Model DW1000L02 with legs DW1000P02 with pedestal	Wood Stove Model DW1500L02 with legs DW1500P02 with pedestal	Wood Stove Model DW2000L02 with legs DW2000P02 with pedestal	Masonry wood insert with brick-lined firebox DW2500X02
Cast iron front door	yes	yes	yes	yes
Heat capacity	up to 1,000 sq. ft.	up to 1,500 sq. ft.	up to 2,000 sq. ft.	up to 1,500 sq. ft.
Firebox dimensions	18 1/4" W x 12 1/2" D	22 1/2" W x 12 3/4" D	21" W x 17" D	20 1/4" W x 12 3/4" D
Volume	1.3 cubic feet	1.5 cubic feet	2.1 cubic feet	1.3 cubic feet
Over-all dimensions*	29" H x 23 3/4" W x 20 1/2" D	30" H x 28 1/4" W x 22 1/4" D	31" H x 26 1/2" W x 27" D	21 3/4" H x 27" W x 20 3/4" D
Min. Fireplace dimensions	N/A	N/A	N/A	22 1/4" H x 28" W x 10"
Range of heat output	10,500 to 26,000 btu/hr	10,300 to 29,300 btu/hr	12,000 to 55,100 btu/hr	9,600 to 58,000 btu/hr
Average efficiency	74.5%	63.0%	70.8%	64%
Average emissions	5.3 grams/hr	4.4 grams/hr	4.4 grams/hr	4.7 grams/hr
Log capacity	18"	22"	20"	20"
Weight	250 lbs Leg model 270 lbs Pedestal model	287 lbs Leg model 300 lbs Pedestal model	340 lbs Leg model 365 lbs Pedestal model	235 lbs
Blower	Optional	Optional	Optional	Standard
Faceplate	N/A	N/A	N/A	44" W x 31" H

* Over-all dimensions: For a complete list of dimensions, please consult the manual.

YOUR DEALER


CFM Corporation
2695 Meadowvale Blvd.
Mississauga, Ontario
Canada, L5N 8A3

ph: 1.800.525.1898
www.vermontcastings.com
www.majesticproducts.com

NATIONAL FIRE PROTECTIVE INSTITUTE
ADVOCATE

© 2006 CFM Corporation - All rights reserved. Dutchwest by Vermont Castings™ is a registered trademark of CFM Corporation. In the interest of constant product improvements, we reserve the right to change specifications without notice. Before installation, please read Installation Instructions and check all local Building Codes and Gas Regulations. Please see your Dealer or visit www.vermontcastings.com for complete warranty information.

FD041 - 1000-9125

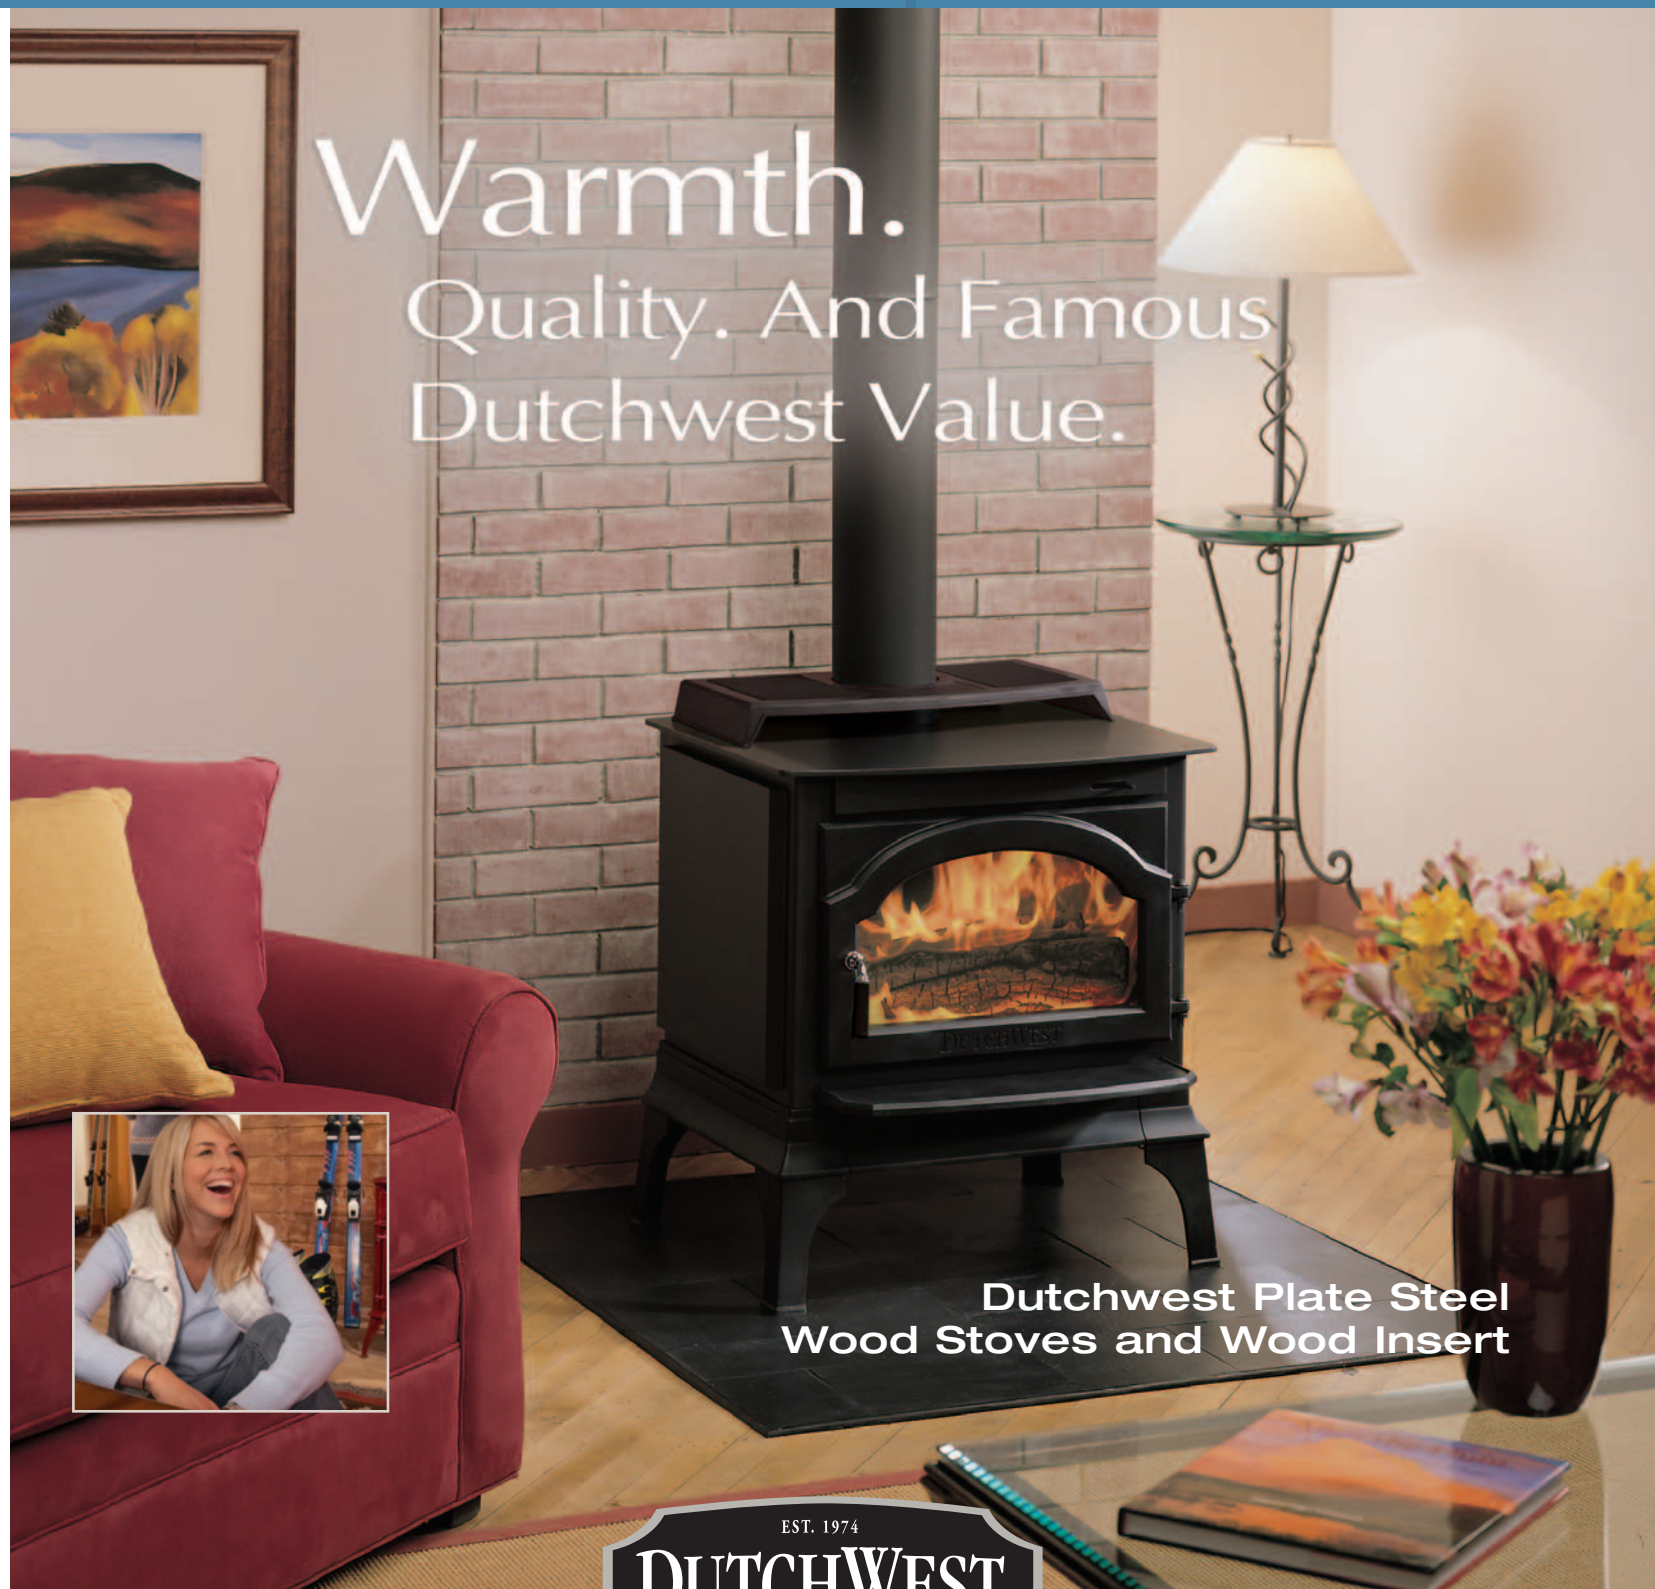



DW1500P02



Wood Stove Model DW1500P02*

- Heats up to 1,500 sq. ft.
- Firebox dimensions: Volume 1.5 cu. ft.; 22 1/2" W x 12 3/4" D
- Overall dimensions: 30" H x 28 1/4" W x 22 1/4"D
- Range of heat output: 10,300 - 29,300 Btu/hr
- Average emissions: 4.4 grams/hr
- Average efficiency: 63.0%
- Log capacity: 22"
- Product Weight: 300 lbs Pedestal model

Dutchwest Wood Stoves & Insert



Wood Stoves Built to Warm and Built to Last.

At Dutchwest, we design every one of our wood stoves to deliver superior performance, durability, and value. Many sizes are available to cover a variety of heating ranges. All models feature a handsomely arched cast iron front door with ceramic glass for easy viewing. Choose from traditional cast iron legs, steel legs or a steel pedestal with a convenient pull out ash door.



DW1500L02

Wood Stove Model DW1500L02*

- Heats up to 1,500 sq. ft.
- Firebox dimensions: Volume 1.5 cu. ft.; 22 1/2" W x 12 3/4" D
- Overall dimensions: 30" H x 28 1/4" W x 22 1/4"D
- Range of heat output: 10,300 - 29,300 Btu/hr
- Average emissions: 4.4 grams/hr
- Average efficiency: 63.0%
- Log capacity: 22"
- Product Weight: 287 lbs Leg model

* Also available in Small and Large sizes, see reverse for specs.



CDW244

Wood Stove Model CDW244

- Heat capacity up to 1,000 sq. ft.
- Features leg base design and brick-lined firebox
- Cast-iron door with ceramic glass
- Firebox dimensions: Volume 1.8 cu. ft.; 20 3/4"W x 13 3/4"D
- Overall dimensions: 26 15/16"H x 22 1/2"W x 20 5/8"D
- Maximum heat output: 26,100 Btu/hr
- Average emissions: 5.3 grams/hr
- Average efficiency: 74.5%
- Log capacity: 18"
- Product Weight: 174 lb.
- Shipping Weight: 198 lb.

Wood Stove Model CDW247001

- Heat capacity up to 1,000 sq. ft.
- HUD approved for use in MOBILE and manufactured homes
- Features pedestal base design
- Cast-iron door with ceramic glass
- Firebox dimensions: Volume 1.7 cu. ft.; 20 1/2"W x 13 3/4"D
- Overall dimensions: 31 3/4"H x 22 3/4"W x 20 3/8"D
- Maximum heat output: 19,000 Btu/hr
- Average efficiency: 65.3%
- Average emissions: 4.9 grams/hr
- Log capacity: 18"
- Product Weight: 220 lb.
- Shipping Weight: 240 lb.



CDW247001

Wood Stove Model CDW270007

- Heat capacity up to 1,500 sq. ft.
- Features pedestal base design with ash drawer and brick-lined firebox
- Cast-iron door with ceramic glass
- Firebox dimensions: Volume 2.0 cu. ft.; 25"W x 14"D
- Overall dimensions: 29 9/16"H x 27"W x 20 7/8"D
- Maximum heat output: 29,300 Btu/hr
- Average efficiency: 63%
- Average emissions: 4.4 grams/hr.
- Log capacity: 22"
- Product Weight: 310 lb.
- Shipping Weight: 330 lb.



CDW270007

Wood Stove Model CDW300007

- Heat capacity up to 2,000 sq. ft.
- Features pedestal base design with ash drawer and brick-lined firebox
- Cast-iron door with ceramic glass
- Firebox dimensions: Volume 2.9 cu. ft.; 23 1/2"W x 18 1/4"D
- Overall dimensions: 31 1/2"H x 26 1/2"W x 25 1/8"D
- Maximum heat output: 55,100 Btu/hr
- Average emissions: 4.4 grams/hr
- Average efficiency: 70.8%
- Log capacity: 20"
- Product Weight: 310 lb.
- Shipping Weight: 338 lb.



CDW300007



CDW1000L02

Wood Stove Model CDW1000L02

- Heats up to 1,000 sq. ft.
- Firebox dimensions: Volume 1.8 cu. ft.; 20 3/4"W x 13 3/4"D
- Overall dimensions: 29 9/16"H x 22 7/8"W x 20 5/8"D
- Polished Nickel cast-iron door with ceramic glass
- Range of heat output: 10,400 - 26,100 Btu/hr
- Average emissions: 5.3 grams/hr
- Average efficiency: 74.5%
- Log capacity: 18"
- Product Weight: 195 lb.
- Shipping Weight: 220 lb.

Wood Stove Model CDW2000L02

- Heats up to 2,000 sq. ft.
- Firebox dimensions: Volume 2.9 cu. ft.; 23 1/2"W x 18 1/4"D
- Overall dimensions: 31 1/2"H x 26 1/2"W x 25 1/8"D
- Polished Nickel cast-iron door with ceramic glass
- Range of heat output: 12,000 - 55,100 Btu/hr
- Average emissions: 4.4 grams/hr
- Average efficiency: 70.8%
- Log capacity: 20"
- Product Weight: 300 lb.
- Shipping Weight: 330 lb.



CDW2000L02



Wood Insert DW2500X02

Wood inserts - The Perfect Solution to an Inefficient Masonry Fireplace.

Crafted with the same sturdy construction as our wood stoves, the Dutchwest masonry wood insert is designed exclusively for existing masonry fireplaces. Standard features include a brick-lined firebox, blower, and faceplate (44 1/8" W x 31" H).

Wood Insert Model DW2500X02

- Heats up to 1,500 sq. ft.
- Firebox dimensions: Volume 1.3 cu. ft.; 20 1/4" W x 12 3/4" D
- Overall dimensions: 21 3/4" H x 27" W x 20 3/4" D
- Range of heat output: 9,600 to 58,000 btu/hr
- Average emissions: 4.7 grams/hr
- Average efficiency: 64.0%
- Log capacity: 20"
- Product Weight: 235 lbs

